



ISSA

**International Shippers
& Services Association**

**SHIP STORES
CATALOGUE**

**2009 Edition
Volume 2**

53 - LUBRICANTS, CHEMICALS, SOLVENTS & CLEANERS

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

5 3 - - - - -

ISSA CODE NO

SPECIALITY CHEMICALS - WEICON**53.402.00 CLEANING****53.402.01 WEICON CLEANER SPRAY S**

To pre-treat surfaces and joints.
Cleans and degreases metals,
glass, ceramics and engine
components
Spray 500 ml

**53.402.02 WEICON SEALANT AND ADHESIVE REMOVER SPRAY**

Removes cured sealants, oil, carbon,
lacquers etc
Spray 400 ml

**53.402.03 WEICON STAINLESS STEEL CARE SPRAY**

Anti-static cleaning and preserving care
agent for mat and glossy stainless steel surfaces,
indoor and outdoor.
Spray 400 ml

53.402.04 WEICON MULTI-FOAM CLEANER

Powerful foam cleaning agent for
universal applications
Spray 400 ml

**53.402.05 WEICON COMPRESSED-AIR SPRAY**

For applications where traditional
methods of dust clean-up would
not work, such as on parts of
difficult access.
Spray 400 ml



ISSA CODE NO

**WEICON METAL-FLUID SPRAY
Universal Metal Care**

Highly-effective product for indoor
care, protection and cleaning of
mat and polished metal surfaces,
ie. stainless-steel, aluminium,
chrome etc.

53.402.30 Spray 400 ml
53.402.31 Pump Dispenser 700 ml

**53.402.35 WEICON WORKSHOP CLEANER**

Workshop Cleaner cleans and
degreases all metals, plastics,
rubbers, glass, ceramics and wood.
Free of solvents and phosphates and
can be diluted with water on a
ratio of max. 1:40

53.402.36 5 ltr
53.402.37 10 ltr
53.402.38 30 ltr

Specify quantity required

Velle Kimyasal Ürünler Nalburkiye Demir Hırdavat San. ve Dış. Tic. Ltd. Şti
Evliya Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - İstanbul
Tuzla V.D 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

53 - LUBRICANTS, CHEMICALS, SOLVENTS & CLEANERS

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

5 3 - - - -

ISSA CODE NO

PROTECTION

53.402.06

WEICON ZINC SPRAY

Long term cathodic corrosion protection (<550 hours salt-spray test acc to DIN 53167 to Din 50021) for all metal surfaces. For priming and touching-up hot galvanized parts
Spray 400 ml



53.402.07

WEICON ZINC SPRAY "Bright Grade"

Long-term corrosion protection. Matches the colour of hot galvanized surfaces, temperature resistant up to 300°C
Spray 400 ml



53.402.08

WEICON CORRO- PROTECTION

Forms a dry wax-like protective film which provides lasting protection of metal tools and precision parts for indoor storage and overseas shipment
Spray 400 ml



53.402.40

RUST PROTECTION 2000 PLUS, CHARCOAL GREY

Rust Protection 2000 Plus is a special corrosion and weathering resistant surface coating made on the basis of iron-III-oxide (hematite). Applied as a system, with zinc spray, the coating was tested for 2000 hours in the salt spray test – this corresponds to approx. 20 years in natural weathering.
Spray 400 ml



53.402.41

RUST PROTECTION 2000 PLUS, SILVER GREY

Rust Protection 2000 Plus is a special corrosion and weathering resistant surface coating made on the basis of iron-III-oxide (hematite). Applied as a system with zinc spray, the coating was tested for 2000 hours in the salt spray test – this corresponds to approx. 20 years in natural weathering.
Spray 400 ml



ISSA CODE NO

53402.42

ALUMINIUM SPRAY A-100

Aluminium pigments of a purity on >>99.5% offer excellent corrosion protection, temperature resistant up to +800°C, abrasion resistant.
Spray 400 ml



53.402.43

STAINLESS STEEL SPRAY

Corrosion and weathering resistant surface coating, abrasion resistant, heat resistant up to 300°C.
Spray 400 ml



53.402.44

WELDING PROTECTION SPRAY

Anti-spatter – Silicone free spray compound used to keep welding nozzles clean and to prevent build up of weld splatter. It does not affect the quality of the welding seam.
Spray 400 ml



53.402.50

SPRAY-ON GREASE (WHITE)

All purpose sprayable grease for highly stressed parts. Contains special wear reduction and corrosion inhibiting additives.
Spray 400 ml



53 402.51

UNIVERSAL SPRAY-ON GREASE WITH MoS2

Strong bonding and high pressure resistant long life grease with MoS2. Friction and wear are reduced for a long time.
Spray 400 ml



53.402.52

ADHERING GREASE (EXTRA STRONG)

Special lubricant and corrosion protection, also for underwater application. Effective protection against aggressive liquids (eg salt water, sewage water) in maritime environments and in wet plants
Spray 400 ml



53 - LUBRICANTS, CHEMICALS, SOLVENTS & CLEANERS

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

5 3 - - - - -

ISSA CODE NO

RUST-LOOSENERS**WEICON RUST LOOSENER AND CONTACT SPRAY**

- 53.402.09 With 6-fold function; and indispensable aid in all repair, maintenance and servicing jobs. Spray 300 ml



63.402.10

WEICON RUST-SHOCK

The 'Chemical wrench' frees up rusted threads within seconds by its unique dual-action: chill effect and capillary action effect. Spray 400 ml



53.402.11

WEICON W44 T**"Turbo-Power-Spray"**

High performance spray for all servicing and maintenance works. Used in all fields of industry and workshops. Spray 400 ml

**LUBRICATION****WEICON TOP-LUB**

- 53.402.12 Transparent, synthetic lubricant for heavy duty operating conditions. Spray 400 ml



53.402.13

WEICON TEFLON®-SPRAY

A grease free, dry film lubricant made of the basis of PTFE. Spray 400 ml



ISSA CODE NO

53.402.14

WEICON SILICONE SPRAY

Sliding and release agent for production and maintenance. Spray 400 ml



53.402.15

WEICON CHAIN & ROPE LUBE SPRAY

Synthetic, transparent lubricant for the inside and outside lubrication of highly stressed chains and wire ropes. Spray 400 ml

**HAND-PROTECTION****WEICON HAND-PROTECTIVE FOAM**

- 53.402.16 The 'invisible glove' prevents the penetration and soiling of the skin's pores. Foam 200 ml



53.402.17-19 Numbers discontinued

53 - LUBRICANTS, CHEMICALS, SOLVENTS & CLEANERS

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

5 3 - - - -

ISSA CODE NO

LEAK DETECTION**WEICON LEAK DETECTION SPRAY**

Non-flammable compound for fast, convenient and reliable location of even the smallest leaks in pressurized pipes or tanks. DIN-DVGW approved for use in gas pipelines.

Approval - ING-5170A00666
Spray 400 ml



53.402.17

ISSA CODE NO

WEICON ANTI-SEIZE ASSEMBLY PASTE AND SPRAY

53.402.70 Weicon High Performance Assembly Paste and Spray for reliable protection against corrosion, seizing and cold welding. Highly resistant to high temperatures up to +1400°C and to high pressure up to 230 N/mm².

WEICON AS "STANDARD GRADE"

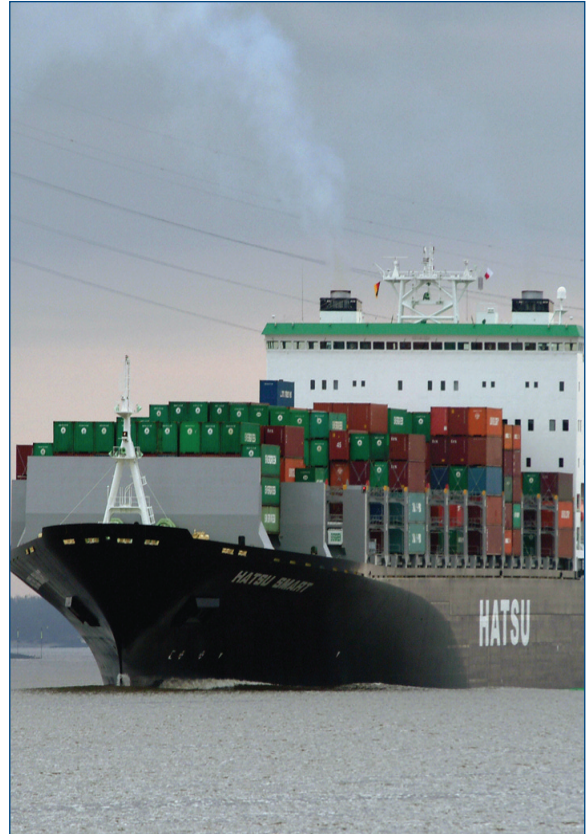
Heat resistant up to +1200°C, high pressure resistant up to 230 N/mm².

53.402.71 400 ml spray can
53.402.72 120 brush top can
53.402.73 400g cartridge
53.402.74 450g can
53.402.75 1.8kg bucket
53.402.76 10kg bucket
53.402.77 20kg bucket

**WEICON ASW "HIGH TECH WHITE"**

'High Tech' metal-free, especially for stainless steel. Heat resistant up to +1400°C, high pressure resistant up to 230 N/mm².

53.402.81 400 ml spray can
53.402.82 120 brush top can
53.402.83 400g cartridge
53.402.84 450g can
53.402.85 1.8kg bucket
53.402.86 10kg bucket
53.402.87 20kg bucket



Velle Kimyasal Ürünler Nalburkiye Demir Hırdavat San. ve Tic. Ltd. Şti
Evliya Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - İstanbul
Tuzla V.D. 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

53 - LUBRICANTS, CHEMICALS, SOLVENTS & CLEANERS

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

5 3 - - - -

ISSA CODE NO

WEICON LUBRICANTS

Weicon Allround Lubricants and high performance greases, available as sprays or pastes

53.052.00 AL-M

For strong bonding and high pressure-resistant long-life grease with MoS₂. For roller and sliding bearings, pivoted bearings, spindles, camshafts and spline shafts, worm gears and open gears, etc.

NLGI Class: 2; colour: black; temperature resistant from -20°C up to +120°C

53.052.01 Cartridge 400g

53.052.02 Can 1kg

53.052.03-04 Numbers discontinued

Specify quantity required**AL-W**

Special lubricant and corrosion protection, also for underwater applications. Effective protection against aggressive liquids (eg. salt water, sewage water) in maritime environments and in wet plants. For roller and sliding bearings, pivoted bearings, levers, open gears, worm gears etc.

NLGI Class: 1-2; colour: beige; temperature resistant from -25°C up to +80°C

53.052.10 Cartridge 400g

53.052.11 Can 1kg

53.052.13-14 Numbers discontinued

Specify quantity required**AL-H**

Odourless and tasteless high-temperature grease for the foodstuffs technology. For roller bearings, sliding bearings, spindles spline shafts etc. NLGI Class: 1; Colour: yellowish-white; temperature resistant from -40°C up to +160°C; NSF registered, NSF H1; LMBG Section 31 and Section 21

53.052.20 Cartridge 400g

53.052.21 Can 1kg

53.052.22-23 Numbers discontinued

Specify quantity required**AL-F**

Allround high-performance grease for lubricating rolling and sliding bearings and for all grease lubrication points, also in the foodstuffs industry. NLGI Class: 2; colour: white temperature resistant from -30°C up to +120°C; NSF registered, NSF H2; LMBG Section 31 and Section 5

53.052.30 Cartridge 400g

53.052.31 Can 1kg

53.052.32-33 Numbers discontinued

Specify quantity required

ISSA CODE NO

SPRAYS**AL-M**

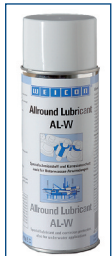
For strong bonding and high pressure-resistant long-life grease with MoS₂. For roller and sliding bearings, pivoted bearings, spindles, camshafts and spline shafts, worm gears and open gears, etc. NLGI Class:2; colour: black; temperature resistant from -20°C up to +120°C

53.052.40

**AL-W**

Special lubricant and corrosion protection, also for underwater applications. Effective protection against aggressive liquids (eg. salt water, sewage water) in maritime environments and in wet plants. For roller and sliding bearings, pivoted bearings, levers, open gears, worm gears etc. NLGI Class: 1-2; colour: beige; temperature resistant from -25°C up to +80°C

53.052.50

**AL-H**

Odourless and tasteless high-temperature grease for the foodstuffs technology. For roller bearings, sliding bearings, spindles spline shafts etc. NLGI Class: 1; Colour: yellowish-white; temperature resistant from -40°C up to +160°C; NSF registered, NSF H1; LMBG Section 31 and Section 21

53.052.60

**AL-F**

Allround high-performance grease for lubricating rolling and sliding bearings and for all grease lubrication points, also in the foodstuffs industry. NLGI Class: 2; colour: white; temperature resistant from -30°C up to +120°C; NSF registered NSF H2; LMBG Section 31 and Section 5

53.052.70



Velle Kimyasal Ürünler Nalburiye Demir Hırdavat San. ve Diş. Tic. Ltd. Şti
Evluya Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - İstanbul
Tuzla V.D. 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

75 - PACKING & JOINTING

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

7 5 - - - - -

ISSA CODE NO

WEICON**75.509.00 PLASTIC METAL PRODUCTS**

High-quality, two-component epoxy resin systems for fast, cost-effective and durable repairs to many types of material. Ideal for rebuilding of shafts, repairing leaking pipes and tanks, repair of pumps and valves damaged by erosion and/or corrosion and many others. Temperature resistant from -35°C to $+120^{\circ}\text{C}$. After curing, the material is machinable with normal working tools and equipment.

WEICON A

Putty, steel-filled. To eliminate corrosion damage and pitting on tanks; for repairing pipes, castings, cases, machine parts etc. Also suitable for making moulds and models, tools and holding devices.

75.509.01 0.5 kg
75.509.02 2.0 kg

WEICON B

Liquid, steel-filled. For making moulds and models, tools and holding devices, templates and gauges. For filling blowholes and micro-porosities on castings as well as for other general repairs.

75.509.03 0.5 kg
75.509.04 2.0 kg

WEICON BR

Putty, bronze-filled. For filling blowholes; for repairing and reconditioning bronze parts, e.g. ship propellers.

75.509.05 0.5 kg
75.509.06 2.0 kg

WEIDLING C

Liquid, aluminium-filled, high temperature resistant from -35°C up to $+220^{\circ}\text{C}$. For pouring-out moulds (e.g. vacuum and foam moulds), making mixing devices and tools exposed to high temperatures.

75.509.07 0.5 kg
75.509.08 2.0 kg

ISSA CODE NO

WEICON F

Putty, aluminium-filled. For filling blowholes; for repairing and reconditioning parts (eg injection moulded parts, holding devices).

75.509.09 0.5 kg
75.509.10 2.0 kg

WEICON F2

Liquid, aluminium-filled. For making models, moulds and templates as well as prototypes and holding devices; for repair of porous and damaged castings; to pour out swages for control of exactness of holding devices.

75.509.11 0.5 kg
75.509.12 2.0 kg

WEICON SF

Putty, steel-filled. Super-fast curing, for emergency repairs, temperature resistant from -35°C to $+90^{\circ}\text{C}$. For quick repairs and bondings (eg on leaky pipes, cases, gears); for anchorages and for making fixing devices.

75.509.13 0.5 kg
75.509.14 2.0 kg

WEICON WR

Liquid, steel-filled, wear-resistant. For repair and build-up of shafts, especially suitable to pour out bearings and blanking dies. Also for making master forms and drawing moulds as well as for underpouring machines and foundations.

75.509.15 0.5 kg
75.509.16 2.0 kg

WEICON WR2

Putty, mineral-filled, wear-resistant. For repair of conveyors, guides, sliding ways and wherever rolling and sliding movements cause wear. Also to line pump cases and extruders.

75.509.17 0.5 kg
75.509.18 2.0 kg

WEICON CERAMIC BL

Liquid, brushable, mineral-filled (carborundum and zircon), extreme wear protection, temperature resistant -35°C to $+180^{\circ}\text{C}$. To line highly stressed pump cases, slide bearings, funnels, pipes etc. For repairing cast parts, valves, blower vanes etc.

75.509.19 0.5 kg
75.509.20 2.0 kg



Velle Kimyasal Ürünler Nalburkiye Demir Hırdavat San. ve Dış. Tic. Ltd. Şti
Evluya Çelebi Mah. İstasyon Cad. Deniz Sok. No: 2 TR-34944 Tuzla - İstanbul
Tuzla V.D 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

75 - PACKING & JOINTING

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

7 5 - - - - -

ISSA CODE NO

WEICON HB 300

Putty, steel-filled, high-temperature resistant from -35°C up to +200°C, briefly up to +280°C. Mixing ratio 1:1. To make blanking and deep-drawing dies, to repair cast and metal parts, to seal, for filling blowholes etc.

75.509.21 1.0 kg

WEICON TI

Putty, titanium-filled. For repairs of pumps, valves, wearing plates, ball-bearing seats, shafts, centrifugal pumps and propellers where high compressive strength and extreme chemical resistance is required. For linings of pump cases slide bearings, etc.

75.509.22 0.5 kg

75.509.23 2.0 kg

ISSA CODE NO

WEICON UW

Putty, titanium-filled, cures even under water. Particularly suitable for repair and maintenance work, ie: pipes, pumps, valves, tanks, vessels and trays, marine and off-shore sector, sewage installations, paper industry and wherever dampness and wetness lead to bonding problems.

75.509.24 0.5 kg

75.509.25 2.0 kg

WEICON CERAMIC W

Putty, mineral-filled, extremely wear resistant, temperature resistant from -35°C up to +150°C, briefly up to +260°C.

75.509.26 2.0 kg

75.509.27 0.5 kg

WEICON®**Chemo-technical products for repair & maintenance****Plastic Metal**

The ideal material for repair and maintenance, tool and mould making. RINA-approved.

**WEICONLOCK®**

Anaerobic Adhesives/Sealants locking - retaining - sealing - gasketing

**Contact**

Cyanoacrylate Adhesives Superfast, economical, versatile, durable

**Anti-Seize**

Reliable protection against corrosion, seizure and wear.

**Allround Lubricant**

High performance greases lubricating - separating - protecting

**Technical Sprays**

For metal protection, cleaning, lubrication, rust loosening etc.



...are just few examples of our range of high-quality products for repair and maintenance which solve problems and get jobs done throughout the world – as they will do on your ship as well.

WEICON Inc.
1721 Bishop Street • Unit 6
Cambridge • Ontario N1T 1N5
Canada
Phone: 001-877-620-8889 toll free
www.weicon.ca • info@weicon.ca

WEICON GmbH & Co. KG
Königsberger Str. 255
DE-48157 Münster
P.O.B 8460 DE-45045 Münster Germany
Tel. +49(0)251 93 22-0
Fax Export +49(0)251 93 22-233
www.weicon.de • eMail: info@weicon.de



VELLE Middle East
Jebel Ali Ind. Zone
Dubai, U.A.E.

Velle Kimyasal Ürünler Nakliyatı Demir Hırdavat San. ve Tic. A.Ş.
Evluya Çelebi Mah. İstasyon Cad. Deniz Sok. No: 101
Tuzla V.D. 924 046 0047 - Tel: +90 (216) 701 24 01 - Fax: +90 (216) 701 24 02
Phone: +971 4 880 25 05
Fax: +971 4 880 25 09

www.velle.com.tr www.weicon.ae • info@weicon.ae

75 - PACKING & JOINTING

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

7 5 - - - - -

ISSA CODE NO

75.530.00 WEICON REPAIR STICKS**DURABLE – VERSATILE – HIGH-STRENGTH****Easy-to Use: Cut-off – Knead – Use****Always the right portion (even for small repairs).**

WEICON Repair Sticks are temperature-resistant from -50°C up to +120°C (briefly up to +150°C). They resist alcohol, ester, salt water, oils, most acids and lyes, are free of solvents and cure with almost no shrinkage. The cured product can be machined (drilled, filed, tapped) and overpainted without pre-treatment.

REPAIR STICK STEEL

Steel filled. Preferably used for quick and high strength repairs and bonds of metal parts. Patches and seals cracks, holes, leakages and surface damage.

75.530.15 57 g
75.530.01 115g

REPAIR STICK AQUA

Ceramic filled. Ideal for quick repairs on damp and wet surfaces and for underwater applications.

75.530.02 57g
75.530.03 115g

REPAIR STICK COPPER

Copper filled. For very quick (pot life 3 min) repairs of cracks, holes, leakages, even on damp and wet surfaces.

75.530.04 57g
75.530.05 115g

REPAIR STICK TITANIUM

Titanium filled. High temperature resistant from -35°C up to +280°C. For permanent high-temperature (briefly up to +300°C) and wear resistant repairs and bonds of metal parts. Patches and seals cracks, holes, leakages and surface damage.

75.530.06 57g
75.530.07 115g

REPAIR STICK PLASTIC

Plastic filled. Especially for durable repairs of plastic parts and fibre reinforced materials (GFRP, CFRP, fibre-glass) with residual elasticity as well as for bondings of metal parts.

75.530.08 57g
75.530.09 115g

ISSA CODE NO

REPAIR STICK ALUMINIUM

Aluminium filled. For very quick non-rusting repairs and bonds of metal parts. Patches and seals cracks, holes, leakages and surface damage.

75.530.10 57g
75.530.11 115g

REPAIR STICK WOOD

Mineral filled. For permanent and elastic, non-shrink repairs of wooden parts. Patches cracks and bore holes, fills broken-out or broken-off wooden parts, seals gaps.

75.530.12 28g
75.530.13 56g

 **VELLE**
Velle Kimyasal Ürünler Nalburkiye Demir Hırsdat San. ve Dis. Tic. Ltd. Sti
Evllya Celebi Mah. Istasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - Istanbul
Tuzla V.D. 924 046 0047 Tel.: +90 (216) 701 24 01 Fax: +90 (216) 701 24 02
www.velle.com.tr



75 - PACKING & JOINTING**ORDER BY REFERENCE NUMBER AND STATE QUANTITY**

7	5	-	-	-	-	-
---	---	---	---	---	---	---

ISSA CODE NO

SEALANTS & ADHESIVES**75.628.00 WEICONLOCK® ANAEROBIC ADHESIVES**

The ideal solution for construction, production and maintenance.

WEICONLOCK products are high quality anaerobic adhesives and sealants on the basis of special methacrylate resins, especially made for economical threadlocking, retaining and sealing of threaded, cylindrical and pipe assemblies. The new pen system offers better dosing and easy application.

AN 302-22

Thread-locking, vibration proof, medium viscosity, low strength

75.628.01 20 ml
75.628.02 50 ml
75.628.03 200 ml

AN 302-43

Thread-locking, higher viscosity, medium strength approved to DVGW/KTW

75.628.06 20 ml
75.628.04 50 ml
75.628.05 200 ml

AN 302-70

Thread-locking, medium viscosity, high strength

75.628.07 20 ml
75.628.08 50 ml
75.628.09 200 ml

AN 305-42

Sealing of pneumatic/hydraulic systems, medium viscosity, medium strength

75.628.10 20 ml
75.628.11 50 ml
75.628.12 200 ml

ISSA CODE NO

AN 305-77

Universal type for pipes and fittings, high viscosity, medium strength. BAM approved for gaseous oxygen

75.628.13 50 ml
75.628.14 200 ml

AN 306-01

Retaining cylindrical assemblies, low viscosity, high strength

75.628.15 20 ml
75.628.16 50 ml
75.628.17 200 ml

AN 306-38

Retaining cylindrical assemblies under high dynamical stress, medium viscosity, high strength

75.628.18 20 ml
75.628.19 50 ml
75.628.20 200 ml

AN 306-41

Retaining, cylindrical assemblies, medium viscosity, medium strength

75.628.21 20 ml
75.628.22 50 ml
75.628.23 200 ml

AN 305-74

Gasketing of flanges, gear boxes and motor housings, high viscosity, high strength

75.628.24 50 ml
75.628.25 200 ml

AN 302-90

Threadlocking, for locking after mounting and sealing of hair-cracks; low viscosity, high strength, hard to disassemble

75.628.28 20 ml
75.628.29 50 ml
75.628.30 200 ml



Velle Kimyasal Ürünler Nalburiye Demir Hırdavat San. ve Tic. Ltd. Şti
 Evliya Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - İstanbul
 Tuzla V.D 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

75 - PACKING & JOINTING

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

7 5 - - - - -

ISSA CODE NO

75.629.00 WEICON CONTACT CYANOACRYLATE ADHESIVES

High-quality cyanoacrylate adhesives to bond a wide range of materials within seconds. The new pen system offers better dosing and easy application.

**VA 100**

General purpose, medium viscosity, fast curing universal type for bonding plastics, rubber and metals to themselves or in combination.

- 75.629.01 12g Pen
75.629.02 30g Pen
75.629.03 60g Pen
75.629.15 500g Bottle

VA 8312

Low viscosity, very fast curing, especially suitable for bonding EPDM elastomers and plastics.

- 75.629.04 12g Pen
75.629.05 30g Pen
75.629.06 60g Pen
75.629.17 500g Bottle

CONTACT GEL

Thixotropic (pasty), slow curing, for application on vertical surfaces.

- 75.629.07 30g Pen

VA 250 BLACK

High viscosity, slow curing, residual elasticity after curing, high temperature resistant up to +135°C.

- 75.629.08 12g Pen
75.629.09 30g Pen
75.629.20 60g Pen
75.629.21 500g Bottle

VA 2500 HT

High viscosity, slow curing, residual elasticity after curing, high temperature resistant up to +135°C.

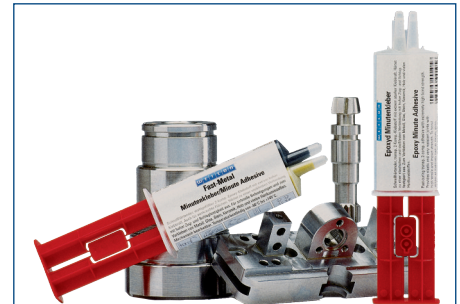
- 75.629.10 12g Pen
75.629.11 30g Pen
75.629.18 60g Pen
75.629.19 500g Bottle

ISSA CODE NO

VA 1401

Medium viscosity, fast curing, good cure also on tissue, paper and carton as well as on other macropore elastomers.

- 75.629.12 12g Pen
75.629.13 30g Pen
75.629.14 60g Pen
75.629.16 500g Bottle

WEICON EPOXY ADHESIVES**WEICON Epoxy Minute Adhesive**

Fast-curing, transparent epoxy adhesive in a twin syringe, providing extremely high adhesive strength.

- 75.629.50 24 ml Twin Syringe

WEICON Fast Metal Minute Adhesive

Fast-curing, steel-filled epoxy adhesive in a twin syringe, providing extremely high adhesive strength, machinable. Temperature resistant -35°C up to +145°C.

- 75.629.51 24 ml Twin Syringe

WEICON RK-CONSTRUCTION ADHESIVES**WEICON Structural Adhesive RK-1300**

High strength, fast-curing structural adhesive with high impact, peel and shear strength. Complete packing consisting of adhesive and activator, no need to mix. Pasty.

- 75.629.52 60 gr.

WEICON Structural Adhesive RK-1500

See RK-1300, liquid

- 75.629.53 60 gr.



Velle Kimyasal Ürünler ve Hizmetleri San. ve Tic. A.Ş. Ltd. Şti
Etiler Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34994 Tuzla - İstanbul
Tuzla V.D. 924 016 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr

75 - PACKING & JOINTING

ORDER BY REFERENCE NUMBER AND STATE QUANTITY

7 5 - - - - -

ISSA CODE NO

75.634.00 WEICON ANTI-SEIZE ASSEMBLY PASTE

These products are now to be found in
SECTION 53 SPECIALITY LUBRICANTS

75.634.00 WEICON SEALANTS**WEICON SILICONE "High Temperature" HT 300**

High-temperature resistant silicone sealant (up to +230°C, briefly up to +300°C). Red.

75.634.20 310 ml (cartridge)

75.634.21 85 ml (tube)

WEICON BLACK-SEAL

75.634.24 Solvent-free Special Silicone Sealant, temperature resistant up to +300°C, dispensed from the practical spray can. High resistance to greases, oils and other liquids.

75.634.24 85 ml tube

75.634.25 200 ml spray can

75.634.26 310 ml cartridge

75.634.22-3 Numbers discontinued

ISSA CODE NO

PRO-GRIP**75.630.00 PRO-GRIP CYANOACRYLATE ADHESIVE**

Pro-Grip 4000 – general purpose

Pro-Grip 5500 – better on metal and ceramics

Pro-Grip 7000 – high viscosity; better for porous surfaces

"MULTI-PURPOSE INSTANT ADHESIVE" is the best description of Pro-Grip. It is the best adhesive for a multitude of difficult maintenance repairs and production bonding. Fast and simple, Pro-Grip adhesives join rubber, plastic, metal – most smooth surfaces – in seconds, with a bond so strong that the substrates often tear before the adhesive falls. Measured strengths from 50 psi (0.345 MPa) to 2500 psi (17.24 MPa).

Packaging:**Pro Grip 4000**

75.630.01 34 fl oz (10ml) bottle

75.630.02 1 fl oz (29.57ml) bottle

75.630.03 16 fl oz (473ml) bottle

Pro Grip 5500

75.630.10 1 fl oz (29.57ml) bottle

75.630.11 16 fl oz (473ml) bottle

75.630.12 1 fl oz (29.57ml) bottle

Pro Grip 7000

75.630.15 34 fl oz (10ml) bottle

75.630.16 1 fl oz (29.57ml) bottle

75.630.17 16 fl oz (473ml) bottle

PRO GRIP 4-MINUTE EPOXY

Gel-like, thixotropic adhesive sets in just 4-6 minutes. Fast cure time makes it ideal for emergency repairs and for production bonding where reduced fixing time is desirable.

75.630.20 50 ml

**VELLE**

Velle Kimyasal Ürünler Naiburiye Demir Hırdavat San. ve Diş. Tic. Ltd. Şti
Evluya Çelebi Mah. İstasyon Cad. Deniz Sok. No.: 2 TR-34944 Tuzla - İstanbul
Tuzla V.D 924 046 0047 Tel.: +90 (216) 701 24 01 Fax.: +90 (216) 701 24 02

www.velle.com.tr